


# 260W-08058-ABC

water-cooled motor / generator with 47 kW power

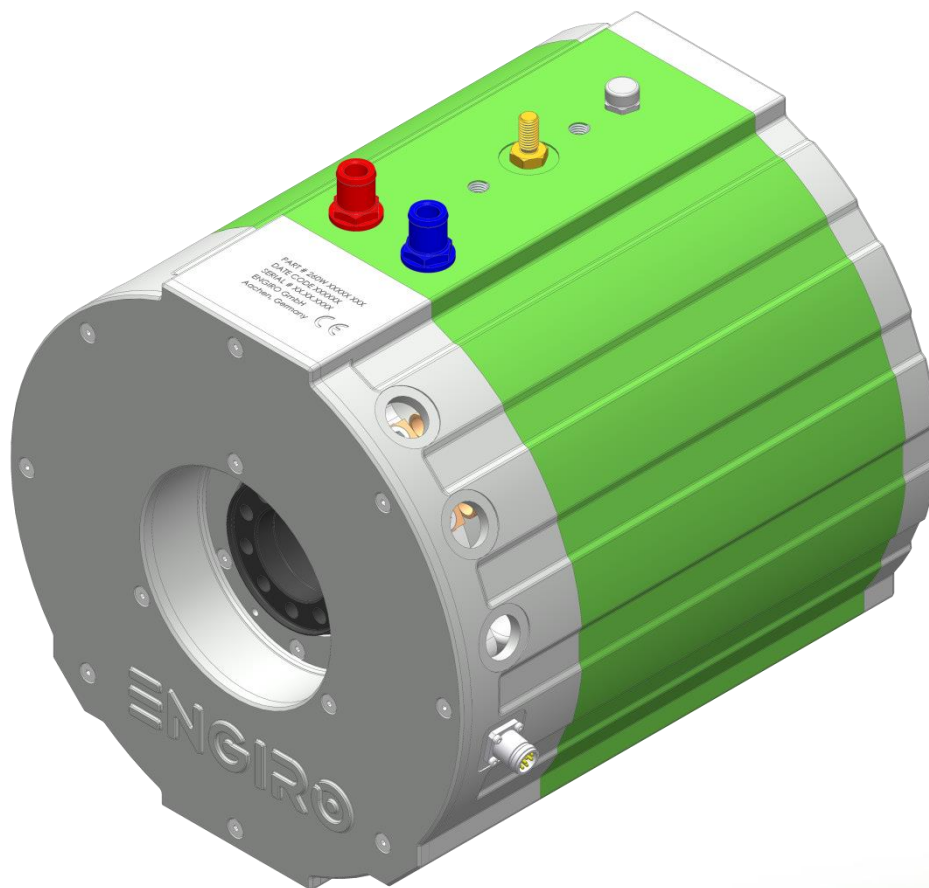

## KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 500 V to 850 V
- delivery with controller possible

Section	Page
Operating Range	3
Available Type Variants / Technical Drawings	4
Performance Plots	5

**Note:**

On September 1<sup>st</sup> , 2024, **we transferred our ERP systems to SAP**. Due to this change, **we are altering our current part numbers**.

From now on, configurations regarding the rear interface of the motor (e.g., accessible rear shaft end, closed, ...) will be specified in a separate part of the motor naming. Therefore, all 260W **D1-flanges will be renamed to S1-flanges** with the according B-side specification.

To see how our article numbers and motor naming scheme has changed, please consider the conversion table below:

Article number conversion					
Part.no.	Old part.no.	Flange	Shaft	Position sensor	B-side interface
4842917	260W_08058_SFN	S1	F1	N	...S11
4807366	260W_08058_SFR	S1	F1	R	...S11
4842916	260W_08058_DFR	S1	F1	R	...D01

**To be noted:**

The information in this technical data sheet is based on our current knowledge and experience. Due to the wide range of possible influences during application, they do not exempt the processor and user from carrying out their own tests and trials. Although the suitability for a specific application can be estimated from our information, a legally binding assurance is by no means possible. Depending on the individual case, we recommend consultation with us. Any industrial property rights and applicable laws must be observed by the recipient of our products on his own responsibility.

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

## Nominal Operation (S2, 30min, cooling as specified below)

Torque	$T_{\text{nom}}$	222	Nm
Power	$P_{\text{nom}}$	47	kW
Speed	$n_{\text{nom}}$	1940	rpm
Phase rms-current	$I_{\text{nom}}$	71 <sup>1,2)</sup>	A
Battery voltage (DC)	$U_{\text{nom}}$	700	V
Electric frequency	$f_{\text{el, nom}}$	161	Hz
Power factor	$\cos(\varphi)$	0.75	

## Maximal Values (S2, 10s, cooling as specified below)

Torque	$T_{\text{max}}$	443	Nm
Power	$P_{\text{max}}$	80	kW
Phase rms-current	$I_{\text{max}}$	170 <sup>2)</sup>	A
Battery voltage (DC)	$U_{\text{max}}$	850	V
Speed	$n_{\text{max}}$	3600	rpm
Electric frequency	$f_{\text{el, max}}$	300	Hz

## Electrical Data

Number of phases		3	
Number of pole pairs		5	
Maximal efficiency		96	%
$T/I$ constant ( $I < I_{\text{nom}}$ )		3.22	Nm/A <sub>rms</sub>
$U/n$ constant (AC) at a temperature of 30°C	rms:	194.8	peak: 275.5 V/(1000rpm)
$K_e$ constant (AC) at a temperature of 30°C	rms:	0.372	peak: 0.526 V/(rad*s <sup>-1</sup> )

## Additional Data

Weight (w/o cables)	68	kg
Rotor moment of inertia	0.067	kg*m <sup>2</sup>
Protection category	IP6K9K <sup>3)</sup>	
Maximal motor temperature	140	°C
Allowed ambient temperature	-20 ... 45 <sup>4)</sup>	°C
Cooling (medium, flow rate, inlet temperature, pressure)	water/glycol 50/50, 14 l/min, ≤ 45°C, ≤ 0.5 bar	
Temperature monitoring	1 x KTY84-130	
Type approval	CE, EN 60034	
Customs tariff number	8501 5230	

## Connectors

Power terminals	3 x M25 cable gland	
Signal connectors	M16, 10 Pin	
Cooling connectors	2 x 3/4" / 19 mm	

<sup>1)</sup> Nominal current strongly dependent on cooling as specified below.

<sup>2)</sup> The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition.

<sup>3)</sup> Please note that the IP6K9K rating is only valid if the machine is installed with suitable cable glands and an appropriate sealed interface at the drive side of the motor (flange and/or shaft). Please contact ENGIRO for further questions. / Only applies to variants with closed B-side / <sup>4)</sup> other range on request

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.


## Available Type Variants

Flange	Shaft	Pos. sensor	B-side interface	Weight (kg)
<b>S1</b> Flange with mounting threads (Ø230 mm centering, Ø250 PCD 8 x M10)	<b>F1</b> Hollow shaft with screw flange (Ø90 and Ø50 mm centering, Ø66 mm PCD 10 x M10)	<b>N</b> None	<b>S11</b> Closed B-side	≈ 68 kg
		<b>R</b> Resolver	<b>D01<sup>1)</sup></b> Shaft interface on b-side (Ø90 and Ø50 mm centering, Ø66 mm PCD 10x M10)	

Other individual combinations are also possible on request.

1) Only approved for  $n \leq 3500$  rpm


## Technical Drawings

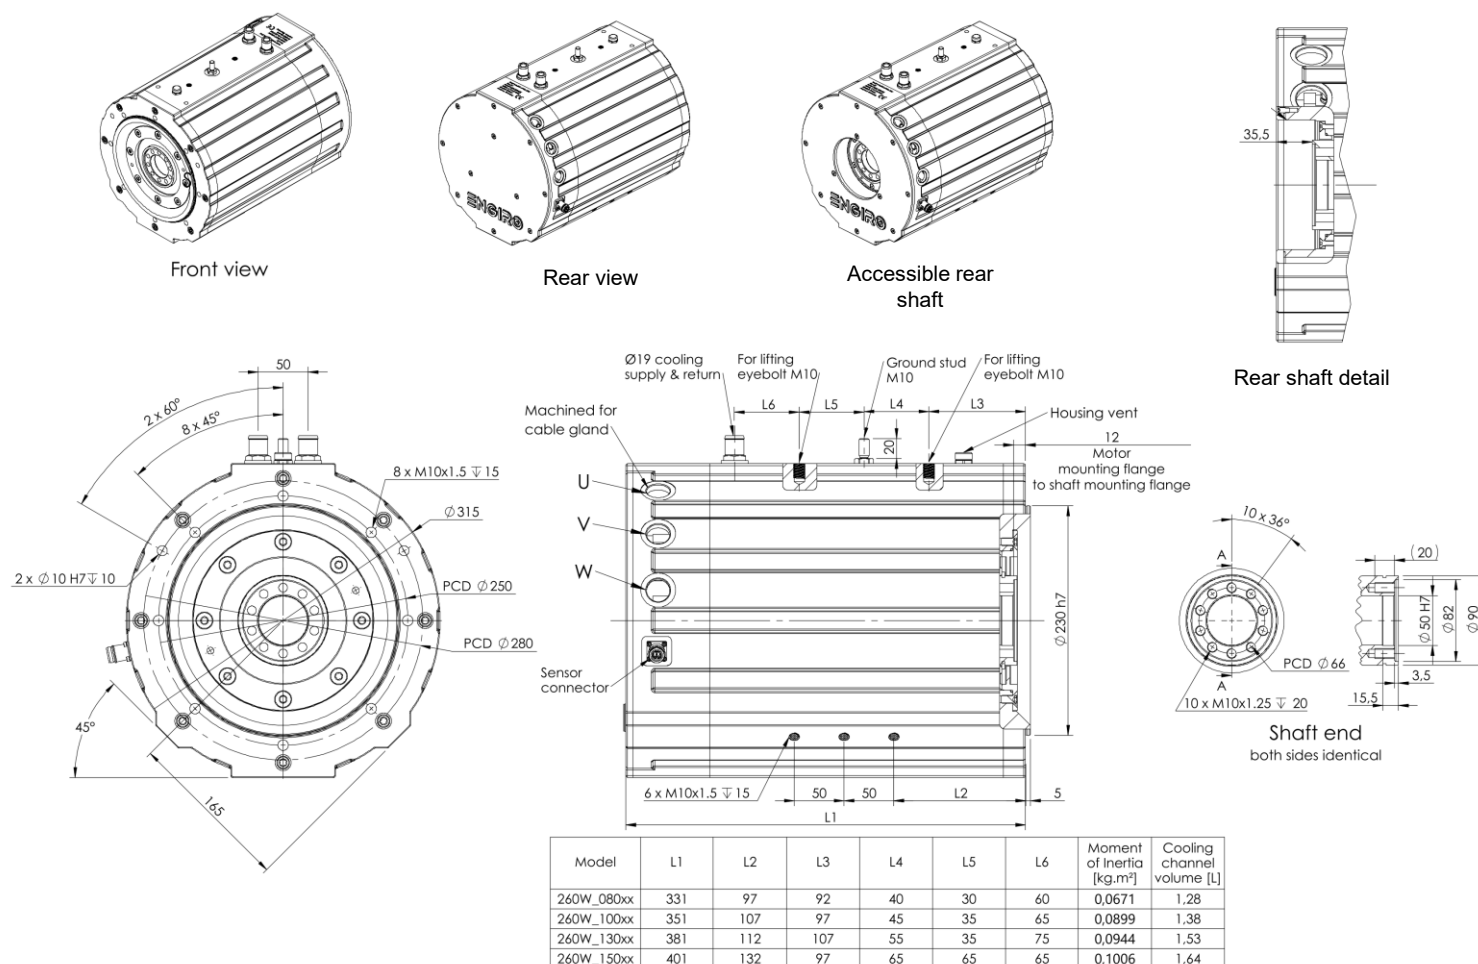

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

### Simulated Efficiency of Motor Application


(electric machine only;  $U_{\text{nom}} = 700 \text{ V}$ ; machine at  $140^\circ\text{C}$ ;) )

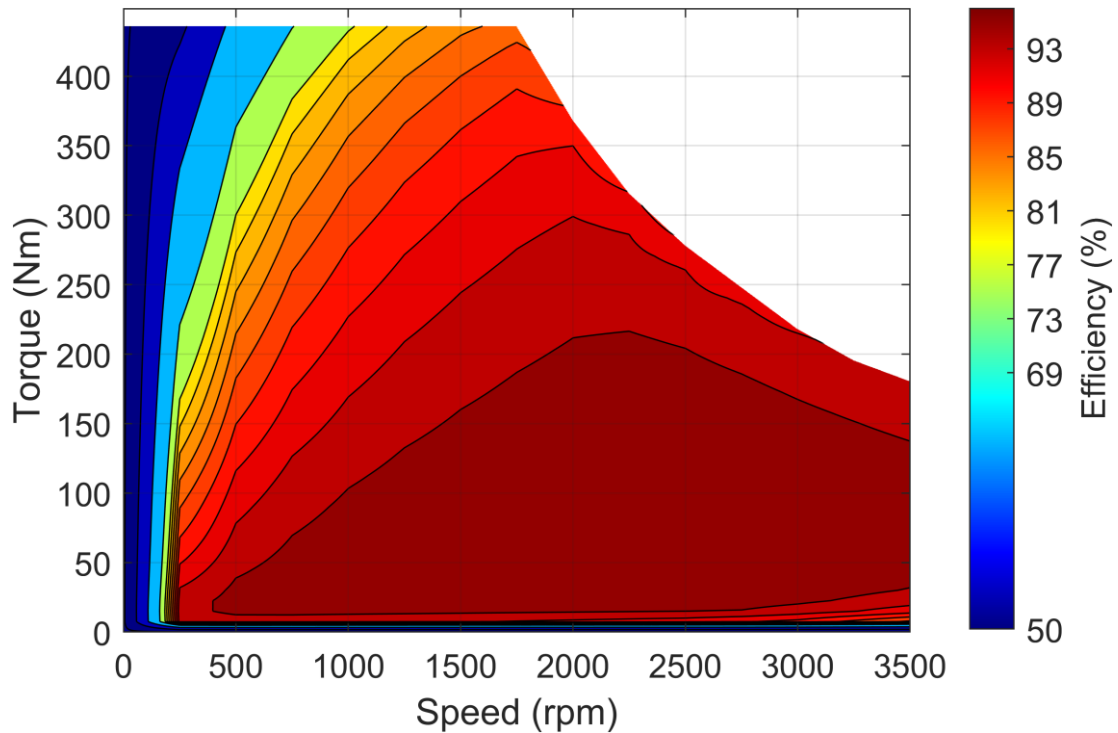

### Simulated Characteristic Motor Parameters

$U_{\text{nom}} = 700 \text{ V}$

solid lines: S2 30min; dashed lines: maximum;

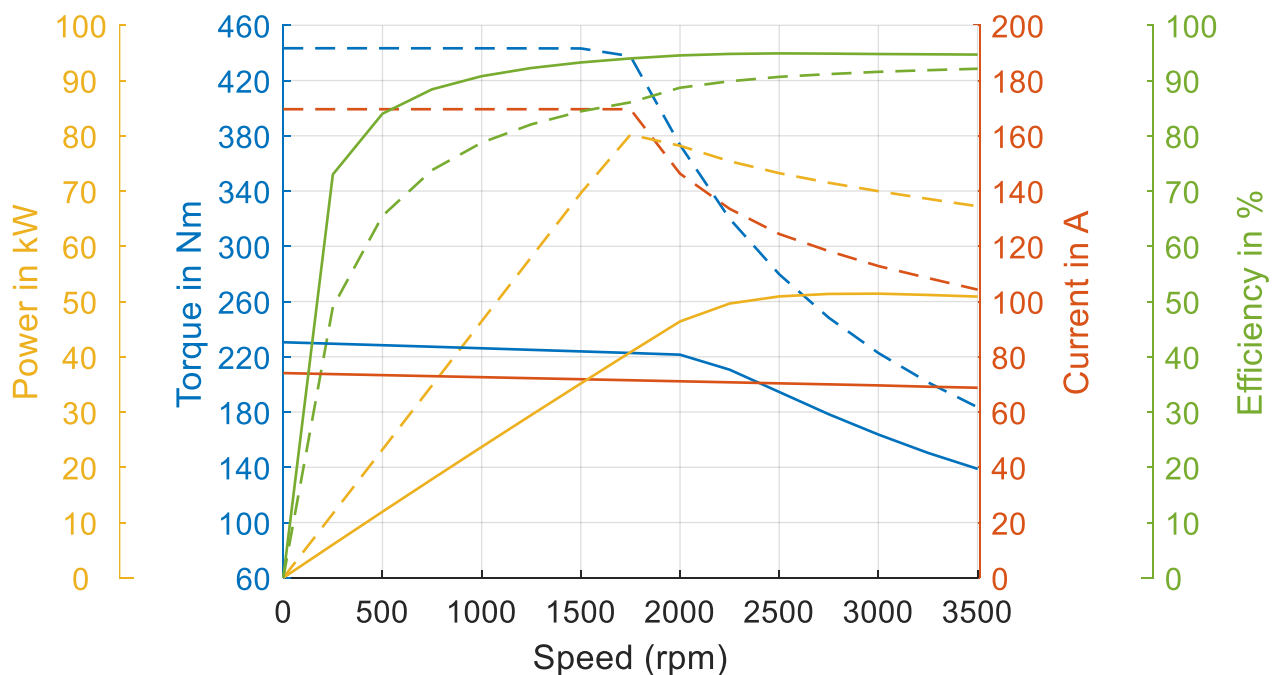

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.